
6600 MAX
Bill Loading Procedure

To avoid jamming, miscount and other errors such as CHAIN NOTE error, it's critical to use the proper bill loading technique. We recommend that the user follow the steps below to properly load the Cassida 6600 MAX.


STEPS

Adjust the bill guides to a size slightly wider (0.10" on each side) than the width of the bills in the stack.


1. Correct or remove the bills if they are wet, excessively dirty, spoiled, damaged, folded or severely wrinkled. Otherwise they can cause jamming and miscounts.

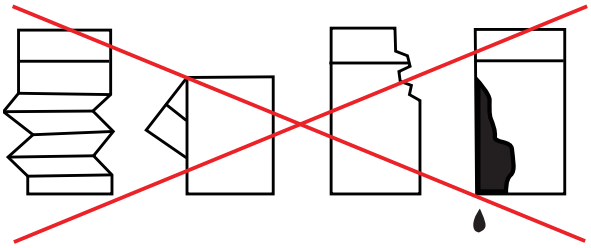

2. Square the bill stack as shown.

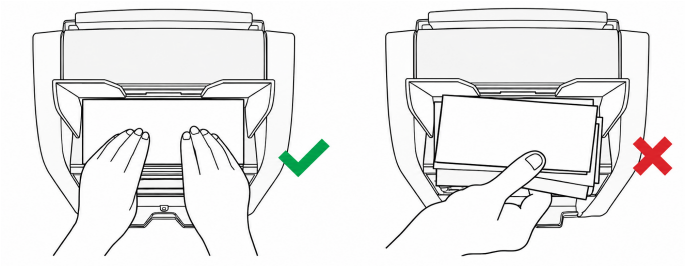

3. Place the bill stack flat on the hopper as shown.

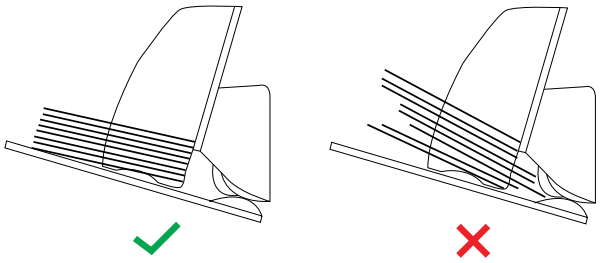

NOTE:

Several factors can cause a Cassida 6600 MAX to jam or not recognize genuine bills:

- Overly wrinkled, overly creased, overly worn, and vandalize bills
- Foreign objects dropped or run through the bill path
- Dropping the machine or bumping into the machine during use
- A harsh change in temperature
- Extended period of non-use
- Improper maintenance or lack of preventative maintenance/cleaning

If, after using the recommended bill loading method, this does not resolve the issue, please see the support section on Cassida USA website at www.Cassidausa.com, or contact Cassida Support at support@Cassidausa.com for further troubleshooting.

©2026 Cassida Corporation. All rights reserved. Specifications subject to change without notice. Cassida is a registered trademark of the Cassida Corporation.
REV102126