


8800R Bill Loading Procedure



The Cassida 8800R can count up to 1,200 bills per minute, making it one of the fastest top loading currency discriminators on the market. Therefore, to avoid jamming, misfeeding or other errors, it is extremely important, and highly recommended, to use proper bill loading technique as presented in this document. For best results, it's also recommended to not count more than 200 bills at a time.

Proper bill loading procedure for top loading machines is as follows:

1. Make sure bill guides are properly installed
(see diagrams on plastic packaging or find the bill guide install document).
2. Adjust the bill guides to a size slightly wider (0.10" on each side) than the width of the bills in the stack (all US dollar denomination are the same size).
3. Correct or remove the bills if they are severely wrinkled, damaged or folded. Avoid counting bills that are excessively dirty, soiled, folded, curled or with foreign material like clips, bands, etc. Bills such as these can cause the machine to malfunction.




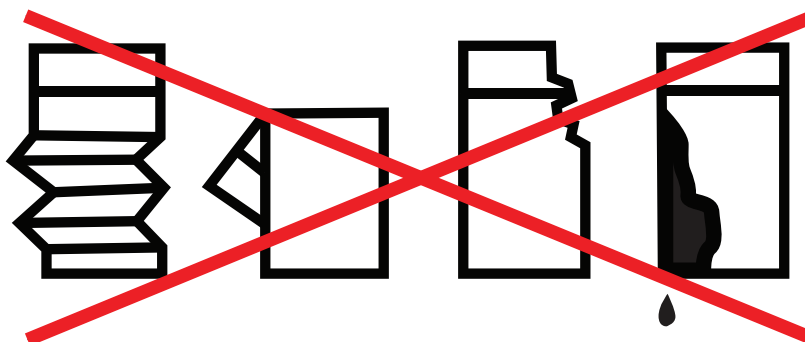


4. Square the stack as shown below:

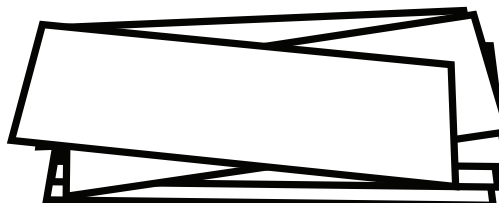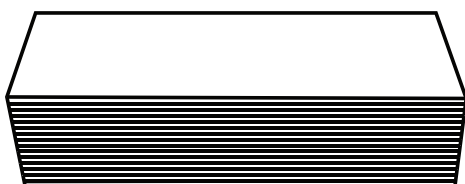

8800R Bill Loading Procedure

5. Place the bill stack flat on the hopper shown below:

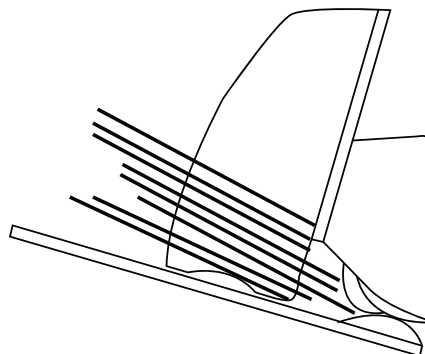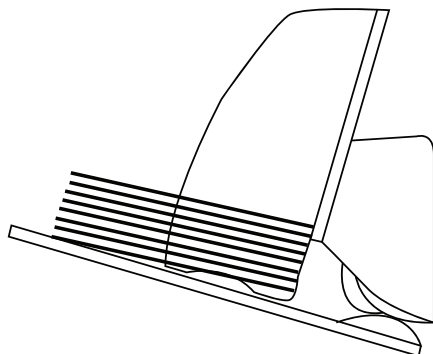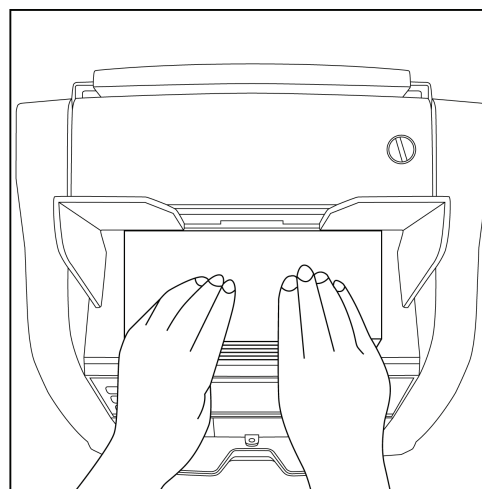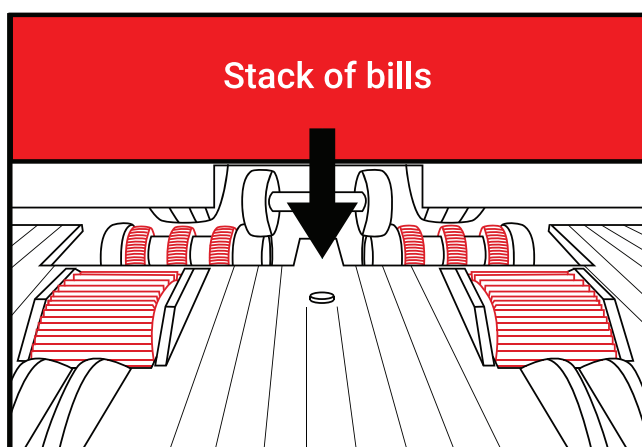

Avoid counting bills that are wet, excessively dirty, soiled, folded, curled or with foreign material like clips, bands, etc. Bills such as these can cause the machine to malfunction.

If issues persist despite using the proper bill loading methods previously stated, please see the support section on the Cassida USA website at www.CassidaUSA.com, or contact Cassida Support at support@CassidaUSA.com for further troubleshooting.